




Q.brixx A102

Measurement Module for Bridge Sensors

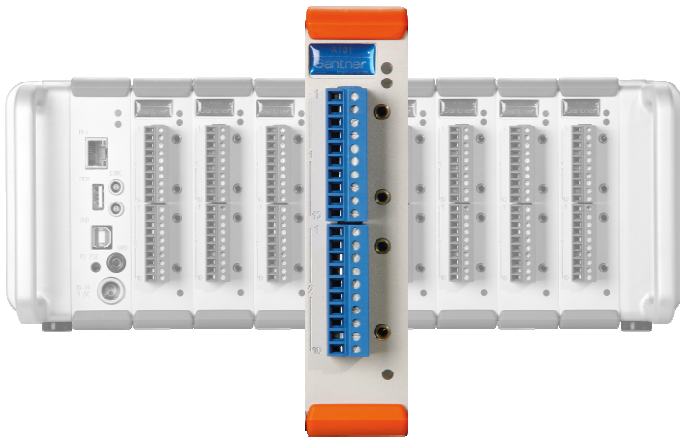

The Q.brixx product line is designed for portable measurements with a high level of flexibility, reliability and accuracy. The range of applications starts from small stand-alone solutions up to networked multi-channel applications in the field of mobile and stationary performance testing and structural monitoring.

The wide range of available modules and the flexibility of the system configuration allows an optimized solution for each single task. Up to 16 modules in one system plus a Controller Unit provide a powerful package with PAC functionality, logging possibilities and an Ethernet TCP/IP interface.


Conclusion: Dynamic signal acquisition up to 100 kHz, inputs and outputs for all types of signals, galvanic isolation of inputs and outputs, multi-channel solutions, high density packaging and intelligent signal conditioning for mobile application.

Most important features of the system:

- **High density and flexibility**
up to 16 modules in one system in any constellation, flexible plug selection
- **Test Controller inclusive**
Ethernet TCP/IP for configuration and data transfer, 12 MByte data memory, expandable by USB device, logging features, PAC functionality, IRIG synchronization
- **Robust and reliable**
stable and compact aluminum housing, easy to carry
electromagnetic compatibility according EN 61000-4 and EN 55011
Temperature range -20 up to +60 °C
power supply 10 up to 30 VDC

Most important features of the module A102:

- **1 analog input channel**
measuring bridge (full, half, quarter), IEPE-sensors, voltage, current
- **1 analog output**
voltage ± 10 V and current 0 up to 25 mA selectable, 100 kHz
- **Fast high accuracy digitalization**
19 Bit ADC - SAR (without delay time), 100 kHz sample rate
- **4 digital inputs, 2 digital outputs**
input: state, tare, memory reset, output: state, alarm, threshold
- **Signal conditioning**
16 virtual channels, linearization, digital filter, average, scaling, min/max storage, RMS, arithmetic, alarm
- **TEDS**
class 1 and class 2, according IEEE 1541.4
- **Galvanic isolation**
of I/O-signals, power supply and interface, isolation voltage 500 VDC

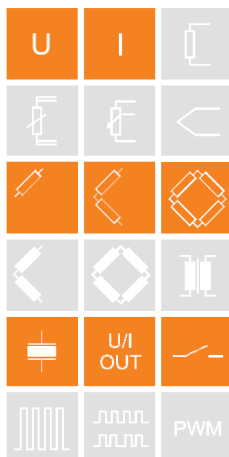




Q.brixx A102

Measurement Module for Bridge Sensors

Block Diagram

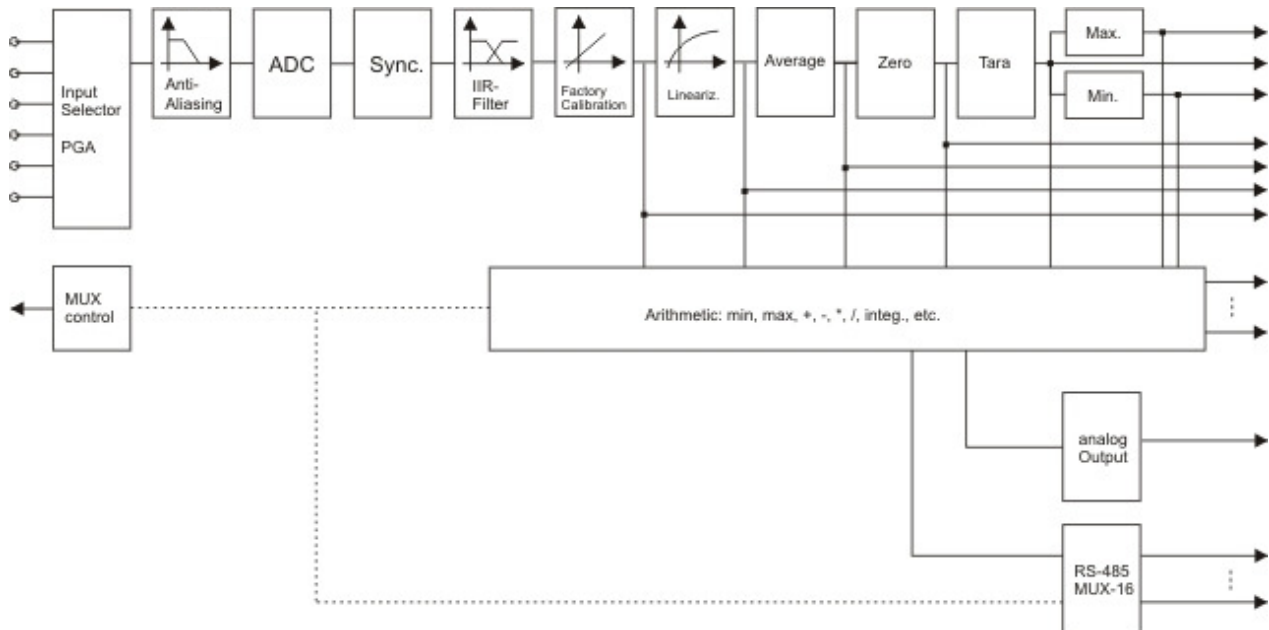

Analog Inputs			
Number	1		
Accuracy	0.01 % typical		
	0.02 % in controlled environment ¹		
	0.05 % in industrial area ²		
Linearity error	0.01 % of the final value typical		
Repeatability	0.003 % typical (within 24 h)		
Sensor identification	TEDS		
Measurement Voltage	Range	max. Deviation	Resolution
	±10 V	±2 mV	40 µV
	±1 V	±0,2 mV	4 µV
	±100 mV	±20 µV	0,4 µV
Input resistance	>10 MΩ (at range ±10 V = 1 MΩ)		
Noise voltage	<50 µVpp		
Long term drift	<1 µV/24 h		
Perm. common mode voltage	500 V permanent		
Temperature influence	on zero	on sensitivity	range ±10 V
	1 µV/10 K	0.05 %/10 K	
Signal-noise-ratio	>90 dB at 1 kHz	>120 dB at 1 Hz	

¹ according EN 61326: 1997, appendix B

² according EN 61326: 1997, appendix A

**Q.brixx A102**

Measurement Module for Bridge Sensors

Measurement Current (internal shunt 50 Ω)	Range		max. Deviation		Resolution	
	0...25 mA		±5 μA		3.0 nA	
Long term drift	<0.1 μA/24 h					
Perm. common mode voltage	500 V permanent					
Temperature influence	on zero			on sensitivity		
	<0.1 μA/10 K			<0.03 %/10 K		
Measuring Bridge						
Accuracy class	0.05					
Sensor type	full bridge, half bridge (5/6 wire), quarter bridge with completion terminal (3 wire)					
Supply	10.0 V	5.0 V	2.5 V	1.0 V		
Perm. sensor resistance	>300 Ω	>100 Ω	>80 Ω	>50 Ω		
Measurement range	±100 mV/V	±200 mV/V	±500 mV/V	±1000 mV/V		
	±25 mV/V	±50 mV/V	±100 mV/V	±250 mV/V		
	±2.5 mV/V	±5 mV/V	±10 mV/V	±20 mV/V		
	±1 mV/V	±2.5 mV/V	±5 mV/V	±10 mV/V		
Shunt calibration	yes, within one bridge section, internal shunt resistance					
Temperature influence	on zero			on sensitivity		
	<10 μV/V/10 K			<0.05%/10 K		
Measurement IEPE Sensor	Range		max. Deviation		Resolution	
	±10 V		±10 mV		1.2μV	
Supply	constant current 4 mA					
Minimum input frequency	2 Hz					
Limit frequency	10 kHz					
Temperature influence	on zero			on sensitivity		
	<10 μV/10 K			0.05 %/10 K		
Analog/Digital-Conversion						
Resolution	19 bit					
Sample rate	100 kHz					
Conversion method	SAR (successive approximation)					
Antialiasing Filter	20 kHz, 5 th order					
Digital filter	IIR, low pass, high pass, 4 th order					
	1 Hz up to 10 kHz in steps 1, 2, 5, automated sample reduction for lower frequencies					
Analog Output						
Accuracy	0.02 %					
Output type	configurable output: voltage ±10 V or current 0 up to 25 mA					
DAC resolution	16 bit					
Sample rate	100 kHz					
Filter:	programmable smoothing filter for 1kHz, 10kHz and 100kHz					
Output voltage	±10 VDC					

**Q.brixx A102**

Measurement Module for Bridge Sensors

Analog Output continued		
Perm. load resistance	>2 kΩ	
Temperature influence	on zero	on sensitivity
	<2 mV/10 K	<0.05 %/10 K
Noise voltage in the range of	<10 mV at 1 kHz	<2 mV at 10 Hz
Long term drift	<1 mV/48h	
Output current	0 up to 25 mA	
perm. burden	<400 Ω	
Temperature influence	on zero	on sensitivity
	4 μA/10 K	0.05 %/10 K
Noise current in the range of	<20 μA at 1 kHz	<4μA at 10 Hz
Long term drift	<2 μA/48h	
Digital In/Outputs		
Number	4 inputs, 2 outputs, 1 slave RS485 interface for controlling the M108	
Input	state, tare, reset	
Input voltage	max. 30 VDC	
Input current	max. 0.5 mA	
Upper threshold	>10 V (high)	
Lower threshold	<2.0 V (low)	
Output	state, alarm	
Contact	open drain p-channel MOSFET	
Load	30 VDC/100 mA (ohmic load)	
Power Supply		
Power supply	10 up to 30 VDC, overvoltage and overload protection	
Power consumption	approx. 2 W	
Influence of the voltage	0.001 %/V	
Environmental		
Operating temperature	-20 °C up to +60 °C	
Storage temperature	-40 °C up to +85 °C	
Relative humidity	5 % up to 95 % at 50 °C, non condensing	

Warm Up Time

All declarations are valid after a warm up time of 45 minutes.

Valid from April 15th 2010. Specification subject to change without notice
DB_Q.brixx_A102_E_13.doc